


# FLEXTRAC

## PLASTIC CHAIN BELT CONVEYORS

NEW!

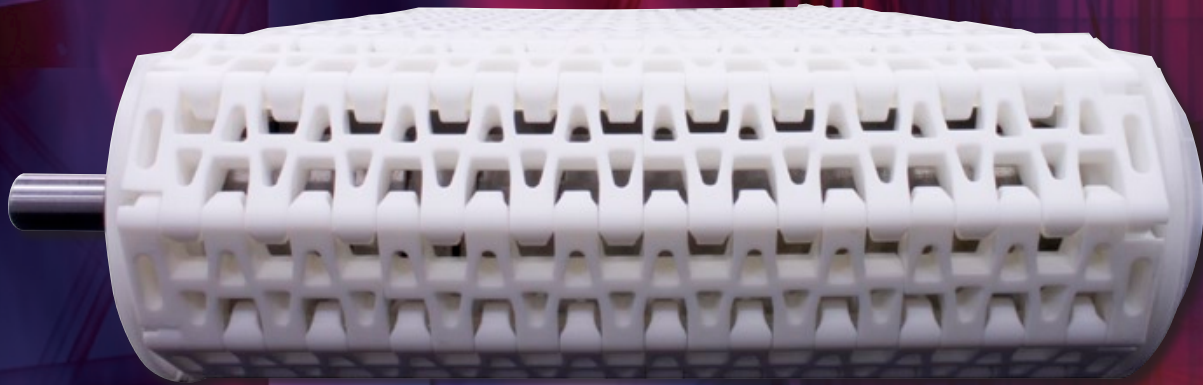

### Longer. Faster. Stronger.

Flextrac Conveyors are available in lengths up to 30' and widths from 4" to 24". They offer high speeds - up to 375 fpm - and heavy load carrying capacities - up to 500 lbs. These conveyors offer a very low profile - a maximum 3.03" at the drive end, with the remainder of the conveyor only 2.41" high.

These sleek, quiet conveyors feature industry-standard 1" pitch belts for maximum compatibility with existing plastic chain applications. We offer 44 standard belt options to meet the demands of your application. Many of our popular 125 Series sides, guides, accessories and drive packages are compatible with Flextrac Conveyors. And, just like our 125 Series conveyors, our Lube-for-Life Bearings provide maintenance-free operation.

Please contact your local representative or distributor or our sales department today at (513) 753-6000 for more information about our Flextrac conveyors.



For more information, visit:  
[www.qcindustries.com/flextrac](http://www.qcindustries.com/flextrac)




# Belt Selections

## Flush Grid Belts

**MATERIAL:** Polypropylene  
General purpose belt; low coefficient of friction for accumulation applications; economical

FDA



**MATERIAL:** Proprietary High Temperature Composite  
Composite material designed for part temperatures up to 392°F

**MATERIAL:** Polyethylene  
Ideal for cold applications or those requiring superior chemical resistance

FDA


**MATERIAL:** Antimicrobial Polyethylene  
Cold application belt with antimicrobial additive

FDA

## Flat Top Belts

**MATERIAL:** Antimicrobial Polyethylene  
Cold application belt with antimicrobial additive; open hinge design for easy cleaning

FDA



**MATERIAL:** Acetal + ESD  
Durable belt with static dissipative properties for electronic assembly and packaging applications

**MATERIAL:** Polypropylene  
General purpose belt; open hinge design for easy cleaning


FDA

## Specialty Belts

**STYLE:** Flush Grid with Rollers  
Ideal for accumulating applications

**MATERIAL:** Polypropylene

FDA



**STYLE:** Nub Top  
Nubbed top for easy product release; open hinge design for easy cleaning

**MATERIAL:** Polypropylene

FDA

**STYLE:** Vent Top  
Ideal for moving small product; open hinge design for easy cleaning

**MATERIAL:** Polypropylene

FDA

**STYLE:** Flat Top with Grip  
High friction belt for positive part movement

**MATERIAL:** Polypropylene (with TPE grips)

## Belts with Flights & Sideguards

**STYLE:** Flat Top with Flights & Sideguards  
Ideal for incline applications; side guards keep product contained

**MATERIAL:** Polypropylene

FDA



**STYLE:** Flat Top with Flights  
Durable belt with flights for incline applications

**MATERIAL:** Acetal

FDA

*This is only a representative sample of the more than 100 belts available.*

